

IN-LINE WORK SURFACE SUPPORTING PEDESTAL LOCKERS



Features

- Top channels attach to work surface
- Cupboard door may hinge right or left
- Leveling glides allow for 1-5/8" adjustment
- Height listed includes leveling glides fully recessed
- WSS does not have a top or counterweight and may not be used in a freestanding application
- One adjustable shelf
- Binder height storage on one shelf only

Basic Construction

- All Metalworks products meet or exceed applicable ANSI-BIFMA standards for durability and safety
- A lifetime warranty ensures long-lasting performance and after-sale support
- Welded steel frame construction and formed channels ensure strength in key areas
- Top and side channels are 18 – 21 gauge cold rolled steel
- Outer panels and drawer bin are 22 gauge steel, door is 20 gauge steel

Options and Accessories

- Laminate fronts are available. Call for details
- Fronts are mechanically fastened and removable to maximize design flexibility

Lock System


- Pedestals come standard with randomly-assigned LL Series locks (#226-325)
- UM locks are available as an option and are black-faced, master-keyed, and core-removable
- Locks may be keyed-alike in the field



LL Series
(Standard)



UM Series

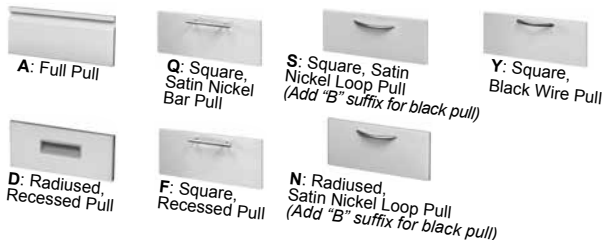

H	D	W	Hinge Location	Pkg Wt	Pkg Cube
27-3/4	21-7/8	15-1/4	right	52 lb	8.6 ft
27-3/4	21-7/8	15-1/4	left	52 lb	8.6 ft